


Commercial backup power solution

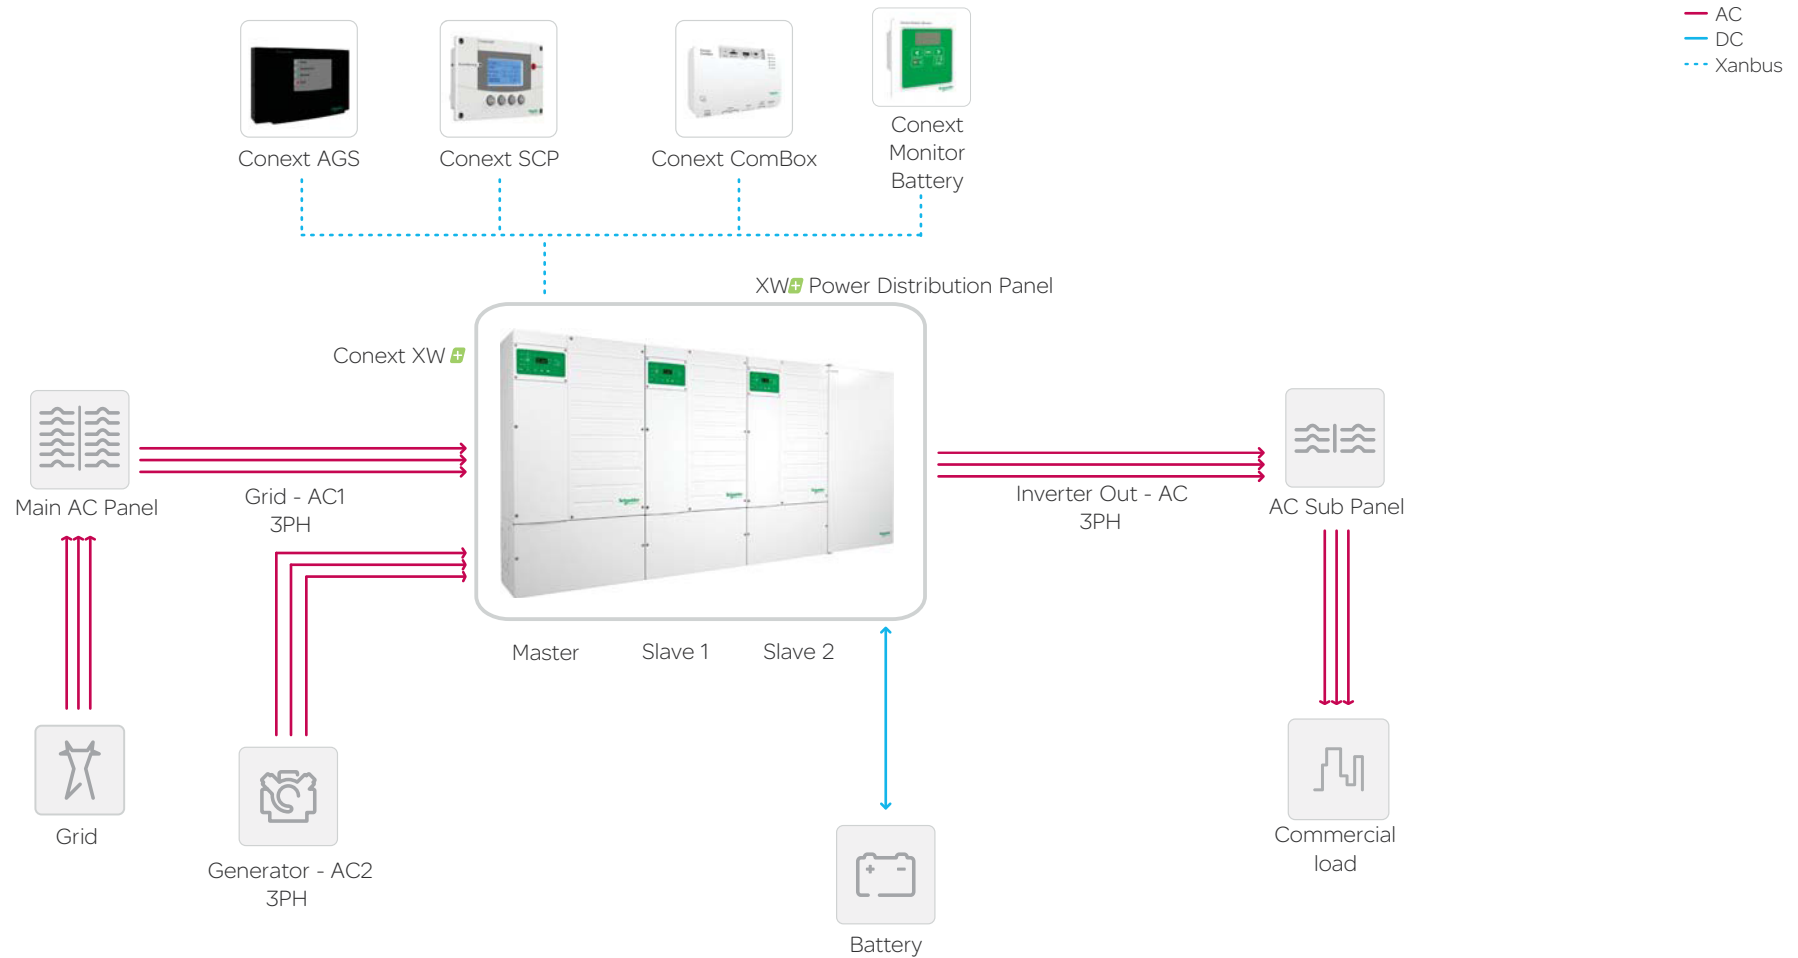

Three-phase (120/208VAC or 230/400VAC) solution with optional AGS/Generator (21.0 or 25.5 kW)
 Three XW+ units are required for three-phase, one per phase.